

## BNC to VGA Converters

### VC-1BAQ

Up to 720x480 Resolution

### VC-3BAQ

Up to 1280x1024 Resolution

Now with  
VESA bracket

The BNC to VGA converters allow displays with a VGA input to display BNC video signals. Traditional CCTV monitors can now be replaced by any display unit with a VGA input, including most LCD monitors.

The converters are compact and can be mounted nearly anywhere. For example, use the included VESA bracket for mounting on most VGA monitors.

### Features:

- Converts almost any VGA monitor into a security monitor
- Compact, perfect for plug and play installations
- Desktop, wall, or VESA mountable (VESA mount included)
- On screen display (OSD) for image adjustment
- Automatically detects NTSC / PAL
- Video input auto-configure
- Memory retains settings after power failure
- Gold-plated BNC connector for longer life
- Includes 5VDC power supply

### VC-3BAQ only:

- Supports resolutions up to 1280x1024
- Dual output for VGA and BNC

### Specifications:

Model #	VC-1BAQ	VC-3BAQ
Conversion type	BNC to VGA	
Input signal	1.0Vp-p, 75Ω BNC Composite	
Output signal	VGA: 0.7Vp-p RGB, 15 pin female D-sub	VGA: 0.7Vp-p RGB, 15 pin female D-sub 1.0Vp-p, 75Ω BNC Composite
Current consumption	200mA@5VDC	800mA@5VDC
Maximum resolution	720x480	1280x1024
Power source	1A@5VDC, 2.5mm	1A@5VDC, 2.5mm
Dimensions	5 <sup>3</sup> / <sub>4</sub> "x2 <sup>9</sup> / <sub>8</sub> "x1 <sup>1</sup> / <sub>16</sub> " (145x67x27 mm)	3 <sup>3</sup> / <sub>8</sub> "x3 <sup>1</sup> / <sub>4</sub> "x1 <sup>1</sup> / <sub>16</sub> " (85x83x27 mm)
Weight	7.8-oz (220g)	7.2-oz (205g)

VC-1BAQ




VC-3BAQ



### Sample Application:


(VC-3BAQ shown)

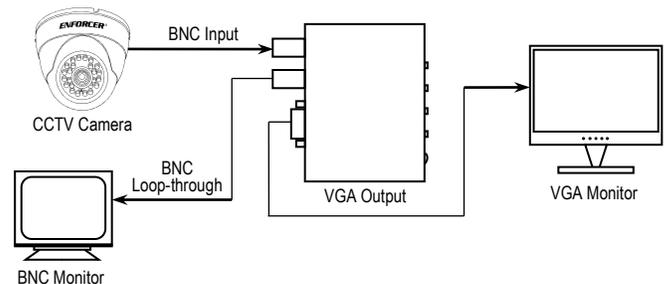


### VESA Mount:

(VC-1BAQ shown)

Mount with 4 screws for monitors sitting in stands



Mount with 2 screws for monitors using mounting arms



### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2014 © SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PiVC-xBAQ\_140908.docx