

## AC-132Q Wireless Doorbell

Always know when someone is at your door. Place the receiver anywhere up to 500 ft\* from the door and easily relocate it anywhere you want at any time. Provides both an audible and visual alert.

### Features:


- Easy installation, attractive design
- Receiver gives both an audible and visual (blue LED) notification when transmitter button is pressed
- Red LED on transmitter for visual feedback
- Digital coding to reduce interference
- Choose from 32 different melodies
- Adjustable sound level (high / low)
- Battery life for transmitter lasts up to one year and for receiver lasts up to 4 months (based on 5 triggers/day)
- Durable ABS plastic housings
- Weatherproof transmitter (IP44)
- Range between transmitter and receiver up to 500 ft (150m)\*



### Specifications:

Frequency	433.92MHz	
Range	Up to 500ft (150m)*	
Current draw (Receiver)	Standby	6.5mA
	Active	22mA (low sound) / 65mA (high sound)
Current draw (Transmitter)	Standby	None
	Active	25mA
Power	Receiver	4.5VDC (3x AA battery, not included)
	Transmitter	3VDC (1x 2032 lithium, included)
Sound level	72dB@1ft (low) or 83dB@1ft (high)	
Material	ABS plastic	
IP Rating (Transmitter)	IP44	
Dimensions	Receiver	6 <sup>5</sup> / <sub>8</sub> "x4 <sup>1</sup> / <sub>4</sub> "x1 <sup>3</sup> / <sub>8</sub> " (168x106x33mm)
	Transmitter	3 <sup>1</sup> / <sub>4</sub> "x1 <sup>1</sup> / <sub>4</sub> "x7 <sup>7</sup> / <sub>8</sub> " (82x33x21mm)
Weight	Receiver	8.5-oz. (240g)
	Transmitter	1-oz. (27g)

### Dimensions:

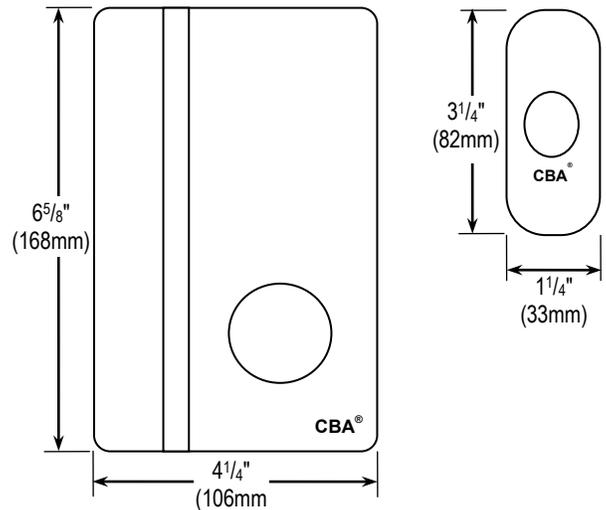

\*Transmission range may vary depending on installation and operating environment

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright 2016 © SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PI\_AC-132Q\_160805.docx